

AmerKool® M81

Demister Coalescing Pad

- *Low pressure drop*
- *Economical in use*
- *Long service life*



The M81 Demister-Coalescing Pad is a heavy duty, highly efficient Mist Eliminator Pad that can be used in several different configurations to meet the specific needs of any application. Because the M81 Pad operates at a low pressure drop and is easily replaceable, it is economical to use in a variety of ventilation, air-conditioning systems and machinery air intake systems. The unique construction of the M81 D/C Pad provides excellent free moisture removal at velocities up to 4 m/s.

Application

M81 D/C Pads should be used for the elimination of mist/free moisture from the environment or caused by processes in the immediate area of the intake. They are typically used in coastal areas, behind air washers, and at plant sites that have long

periods of heavy rain and/or frequent heavy fog/mist. The M81 D/C Pads can be used in several configurations with increasing degrees of effectiveness.

A) A weatherhood with a M81 D/C pad is effective under moderate moisture conditions or where heavy moisture conditions exist occasionally.

B) A 2 1/2 pass weather louver with a M81 D/C pad is well suited effective for heavy moisture conditions.

Drain shelves and troughs or trapped chains should always be provided for when heavy moisture is anticipated. AAF demister sections are available with integral drainage systems designed to meet each application's specific needs.

Construction

The M81 Demister-Coalescing Pad Media is made from a 75 mm (3 inch) thick blanket of continuous filament glass fibres. A specially formulated water resistant binder is applied during the glass spinning process that allows the media to maintain its thickness and resiliency when saturated.

The pads are also made with an exclusive two-stage density, consisting of an open weave fibre pattern on the air entering side and a tighter weave on the air leaving side. This unique construction permits use of the full depth of the pad, thus increasing the amount of water each pad can hold

AmerKool™ M81


Specification

The media is 75 mm (3 inch) thick. It is gold with a blue tint on the air leaving side. The glass fibres have been sprayed with a water resistant binder that enables the media to maintain its



thickness and resiliency while saturated with water. The media is supplied in pre-cut pads. Pre-cut pads are packaged in a corrugated fibre board box. Each box contains 20 pads.

Product information

Standard size pads		
Actual size	Quantity per carton	Shipping Wt. per carton
mm		kg / lbs
inch		
508x508x75 20x20x3	20	3.5 / 7.7
635x635x75 25x25x3	20	5.0 / 11.0

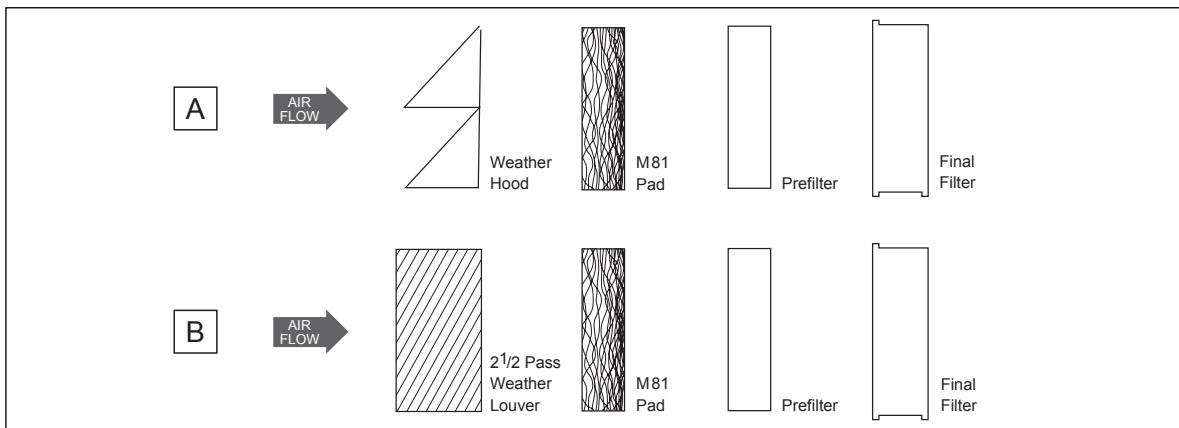

Performance data

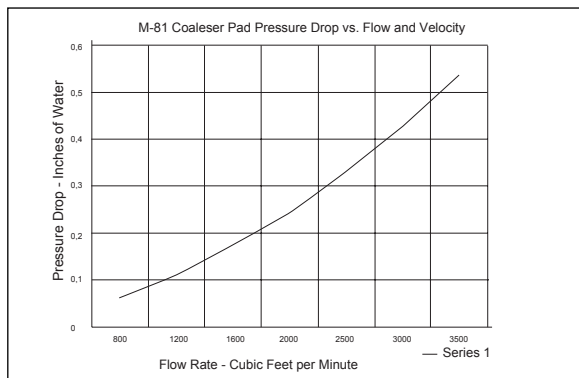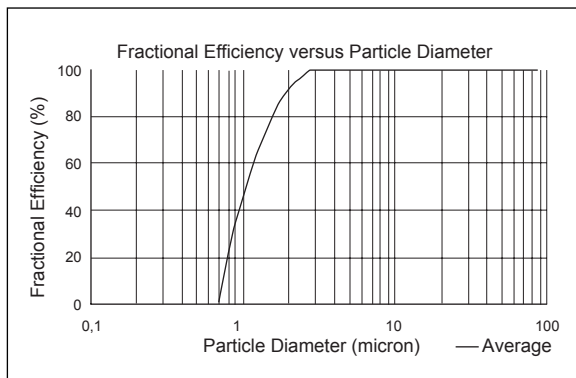

AAF-International B.V.
P.O. Box 7928
1008 AC Amsterdam
The Netherlands
Tel.: + 31 20 549 44 11
Fax: + 31 20 644 43 98
www.aafeurope.com

International AAF Offices:
Amsterdam (NL), Athens (GR), Brussels (B),
Cramlington (GB), Dortmund (D), Dubai
(UAE), Helsinki (Fin), Istanbul (TR), Lisbon
(P), Louisville, Ky (USA), Madrid (E), Mexico
(Mex), Mozzate-Co (I), Paris (F), Bangalore
(IND), Riyadh (KSA), Shah Alam (Mal),

Suzhou, Shenzhen (PRC), Singapore,
Taiwan, Vienna (A)

AAF Agents:
Johannesburg (RSA)



AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

RA-3-528-IN-0307

© 2007 AAF International