



Micro Guard® 99

HEPA and ULPA Filters

99.97%, 99.99%, 99.999% on .3 micron particles



- Every filter individually tested
- Standard capacity and high capacity
- Gasket seal and gel seal
- High temperature models
- UL 900, 586

Micro Guard® 99

HEPA and ULPA Filters

State-of-the-Art
Engineering and Design



Every Micro Guard 99 filter is individually tested at the factory before it is shipped.

Cell Sides:

Choose from particle board, fire retardant particle board, fire retardant plywood, galvanized steel, stainless steel, formed aluminum or anodized aluminum.

Media:

Wet laid paper produced from glass microfibers, Micro Guard 99 media is water and heat resistant. The continuous media sheet is subject to eleven distinct tests and inspections prior to shipment.

Pleat Design:

Micro Guard 99 filters utilize a unique score fold design developed by Airguard. This channel design increases media surface area and reduces opportunities for media damage during handling and installation.

Faceguards:

Expanded metal faceguards in galvanized steel, stainless steel or aluminum can be furnished on one or both sides of the filter.

Separators:

Utilizing Airguard's hemmed (rolled) safety edge, corrugated aluminum separators allow for maximum media utilization. The design minimizes risk of media puncture, adds overall filter pack rigidity and stability, and offers maximum air flow through the filter. Separator materials offered include aluminum, vinyl coated aluminum, and kraft paper.


Sealant/Bond:

The entire media pack is bonded to the interior of the cell sides with urethane sealant. Silicone bond is used in high temperature models (500°F).

Gaskets:

Dove tail interlocking urethane gaskets are standard on Micro Guard 99. Gaskets are 3/4" x 1/4" and are furnished as standard on the air leaving (downstream) side of the filter. Silicone gaskets are used on high temperature models. Gel seal filters are also available.

Air Flow Capacity vs. Initial Resistance

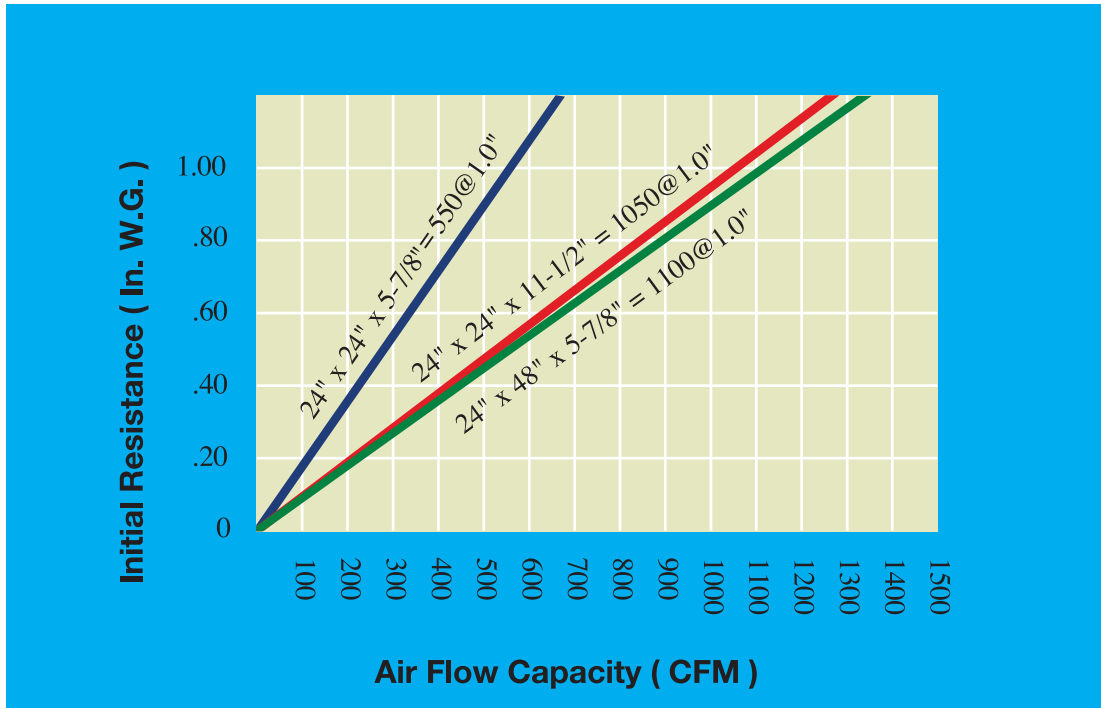

Standard Micro Guard 99 Sizes

Actual Filter Size (Inches) H x W x D	Air Flow Capacity (CFM) @1.0" W.G.	Actual Filter Size (Inches) H x W x D	Air Flow Capacity (CFM) @1.0" W.G.	Actual Filter Size (Inches) H x W x D	Air Flow Capacity (CFM) @1.0" W.G.
12 x 12 x 11-1/2	260	8 x 8 x 5-7/8	55	30 x 24 x 5-7/8	685
12 x 24 x 11-1/2	525	12 x 12 x 5-7/8	140	30 x 30 x 5-7/8	860
15-3/8 x 19-3/8 x 11-1/2	545	12 x 24 x 5-7/8	275	30 x 36 x 5-7/8	1030
20-7/8 x 20-7/8 x 11-1/2	795	20-7/8 x 44-7/8 x 5-7/8	895	30 x 48 x 5-7/8	1370
23-3/8 x 23-3/8 x 11-1/2	1000	23-1/4 x 47-1/4 x 5-7/8	1050	30 x 60 x 5-7/8	1715
24 x 12 x 11-1/2	525	23-3/8 x 23-3/8 x 5-7/8	520	30 x 72 x 5-7/8	2055
24 x 24 x 11-1/2	1050	24 x 24 x 5-7/8	550	36 x 24 x 5-7/8	825
24 x 30 x 11-1/2	1315	24 x 30 x 5-7/8	685	36 x 30 x 5-7/8	1030
		24 x 36 x 5-7/8	825	36 x 36 x 5-7/8	1235
		24 x 48 x 5-7/8	1100	36 x 48 x 5-7/8	1645
		24 x 60 x 5-7/8	1370	36 x 60 x 5-7/8	2055
		24 x 72 x 5-7/8	1645	36 x 72 x 5-7/8	2470

1. All dimensions shown are actual filter sizes (not including gaskets). Filters have a manufacturing tolerance of +0 -1/8" to insure proper fit.
2. All filters are listed with the height (H) dimension shown first. It is important to install the filters with the pleats in the vertical position only.
3. Underwriters Laboratories Classifications: Micro Guard 99 filters are available with UL 900 or UL 586 classifications.
4. Operating temperature limits (continuous): 180° F (82° C) - high temperature models available up to 500° F (260° C).

Micro Guard® 2000

High Capacity HEPA Filters

500 FPM Operation

Micro Guard 2000 high capacity HEPA filters are designed for use in higher air flow applications up to 500 FPM. They offer a wide range of operating and cost advantages including:

- Higher air flow with no increase in resistance.
- Higher air flow while providing HEPA efficiency.
- Lower resistance, lower energy cost, longer life at standard air flow rates. Micro Guard 2000 filters have only .60" W.G. resistance at 1000 CFM.
- Longer service life reduces disposal costs, less contribution to landfills.
- Reduces space required for filter bank.

High capacity operation is achieved by designing additional media into the filters – 50% more than standard capacity HEPA's. Decreased height of the corrugated separators enables the filter to contain more pleats, more media.

New Installations

If designing a new system, Micro Guard 2000 filters can reduce the space required for HEPA filters by installing one half the quantity normally specified. Delivery of 2000 CFM at only 1.35" W.G. or 1500 CFM at 1.0" W.G. offers a wide range of space saving opportunities.



Renovations

If renovating an existing system, selection of high capacity filters means longer service life, lower resistance, lower energy cost, lower maintenance expenses and less disposal cost, if existing air flow rates are maintained. Micro Guard 2000 filters are directly interchangeable with standard HEPA filters.

Choose from Three Efficiencies

- 99.97% on 0.3 microns
- 99.99% on 0.3 microns
- 99.999% on 0.3 microns

Micro Guard 2000 High Capacity Model Number	Filter Dimensions H x W x D (inches)	99.97%			99.99%			99.999%		
		Capacity (CFM) @ initial pressure drop			Capacity (CFM) @ initial pressure drop			Capacity (CFM) @ initial pressure drop		
		.60"	1.0"	1.35"	.60"	1.0"	1.35"	.60"	1.0"	1.35"
MC2000-501	24 x 24 x 11-1/2	1000	1500	2000	1000	1500	2000	760	1170	1560
MC2000-501A	23-3/8 x 23-3/8 x 11-1/2	930	1400	1870	930	1400	1870	720	1100	1460
MC2000-500	12 x 24 x 11-1/2	500	750	1000	500	750	1000	300	575	780
MC2000-500A	11-3/8 x 23-3/8 x 11-1/2	450	690	920	450	690	920	350	540	715

A-MICROGUARD99-0514



www.airguard.com



Distributed by:



CLARCOR Air Filtration Products
 100 River Ridge Circle • Jeffersonville, IN 47130
 Customer Service: 1-866-247-4827 • Fax: 1-866-601-1809
 Email: mailbag@airguard.com • www.airguard.com

© 2014 CLARCOR Air Filtration Products.
 CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice.
 Terms and Conditions of Sale can be accessed in the "LOGIN" section at www.airguard.com