

XPleat* filters

pleated filters with Polyethersulfone (PES) membrane



figure 1: Xpleat PES filters

typical applications

- For general water services
- For fine process fluid filtration
- For processes that require excellent flow rates

general properties

Xpleat filters are available the following absolute pore size micron ratings: 0.1, 0.2, 0.45 and 0.65 μm . Tables 1, 2, 3 and 4 show further details on materials of construction, dimensions, operational limits and flow performance.

table 1: materials of construction

Filter Media	Polyethersulfone Membrane
Media Support	Polypropylene Microfiber
Components	Polypropylene
Sealing	Thermal Bonding
O-Rings/Gaskets	Silicone, Buna, Viton ¹ , EPDM

¹Viton is a trademark of DuPont

table 2: dimensions

outside diameter	2.75" (70 mm)
inside diameter	1.25" (31 mm)
effective filtration area	8.1ft ² (0.75m ²)
lengths	10, 20, 30, 40 inches (25.4, 50.8, 76.2, 101 cm)


table 3: operational limits

maximum forward differential pressure	60 psi (4.14 bar)
maximum reverse differential pressure	30 psi (2.07 bar)
maximum operating temperature	180°F (82°C) at 10 psid (0.69 bar) in water

chemical compatibility

SUEZ filter cartridges are designed and manufactured for resistance to a wide range of chemical solutions. Conditions will vary with each application and users should carefully verify chemical compatibility. Please contact your SUEZ distributor for more information.

table 4: flow performance in clean water¹

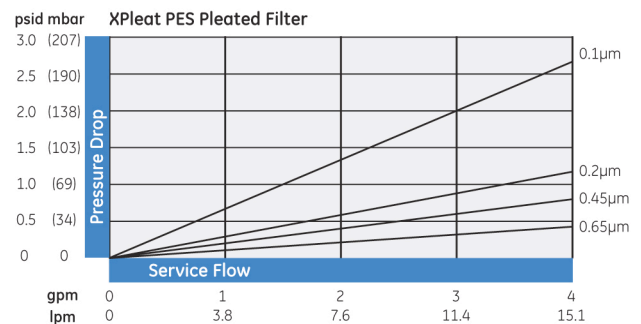

¹data based on 10" length filter

additional information

SUEZ certifies that the materials contained within the Xpleat PES filters meet U.S. FDA requirements for food contact under the applicable regulations in 21CFR. Xpleat PES filters meet the test criteria for USP Class VI-121C Plastics.

Find a contact near you by visiting www.suezwatertechnologies.com and clicking on "Contact Us."

* Trademark of SUEZ; may be registered in one or more countries.

©2017 SUEZ. All rights reserved.

product name	membrane media	absolute micron rating	length inches (cm)	end #1 adapter	end #2 adapter	elastomer material
XPLT	PES	0.1 µm 0.2 µm 0.45 µm 0.65 µm	10 inch (25.4 cm) 20 inch (50.8 cm) 30 inch (76 cm) 40 inch (101.6 cm)	OEG ¹ 120 213 ² 222 226	OEG 120 213 FIN FLT	B = Buna E = EPDM V = Viton ³ S = Silicone
example: XPLT-PES-0.2-10-222-FIN-E						

Table 5: Ordering Information

¹OEG – Open End Gasket

²213-FLT for use with 10" Ametek Housings

³Viton is a registered trademark of DuPont

XPleat is available in case quantities only.

XPleat part numbers reflect case quantities of six (6).

Viton Gaskets available for additional charge.

